

MODEL TS-2T



SPECIFICATIONS

- GREEN 2 INCH SQUARE PUSHBUTTON
- LABELED "PUSH TO EXIT"
- MOMENTARY ACTION SWITCH
- S.P.D.T. TIMED CONTACTS RATED 2A.@35 VDC
- TIME DELAY ADJUSTABLE FROM 2 TO 45 SECONDS
- TIMER INPUT VOLTAGE 12 TO 24 VDC OR VAC
- SWITCH ILLUMINATED WITH HI-BRIGHTNESS LED, OPERATES ON 12 OR 24 VOLTS AC/DC
- SWITCH MOUNTED ON SINGLE GANG S.S. PLATE
- CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL, U.L. FILE NUMBER SA32686



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538


WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

INSTALLATION INSTRUCTIONS

MODELS TS-2T, TS-3T, TS-4T, TS-5T



U.L. FILE SA32686

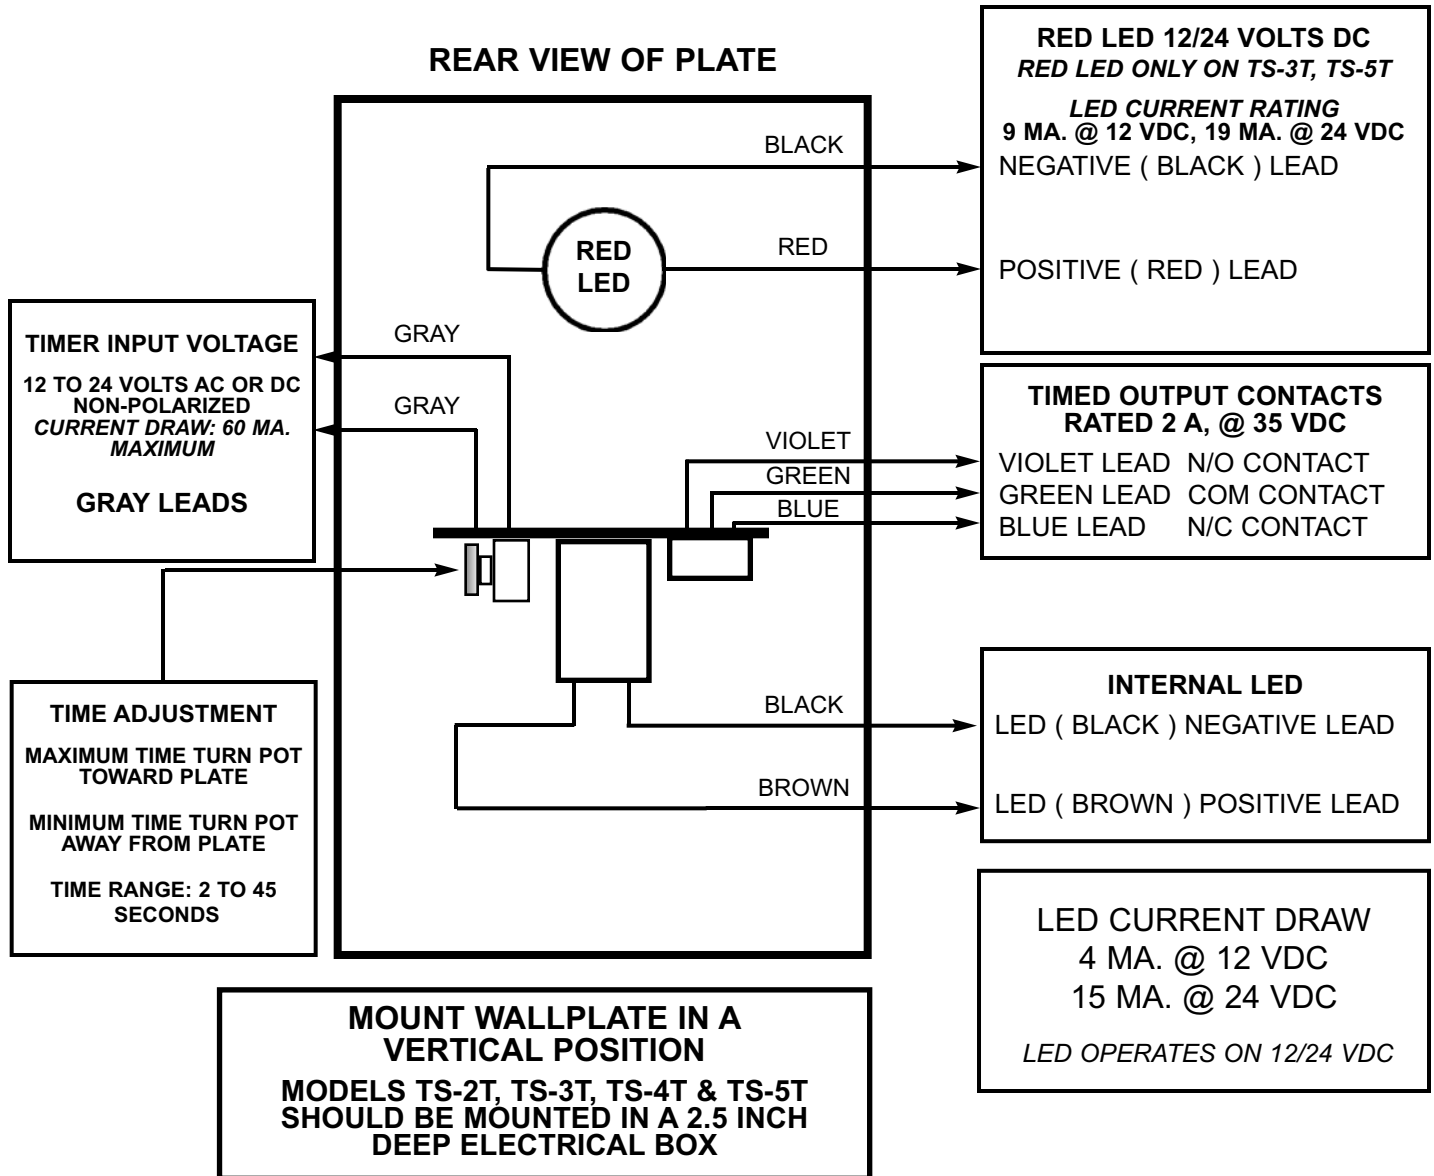


NOTE: TIMER WILL ACTIVATE WHEN **PUSH TO EXIT** SWITCH IS DEPRESSED.
SUBSEQUENT DEPRESSIONS OF THE SWITCH WILL RE-START THE TIMER.



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500
WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM

TYPICAL WIRING DIAGRAMS FOR MODEL TS-2T

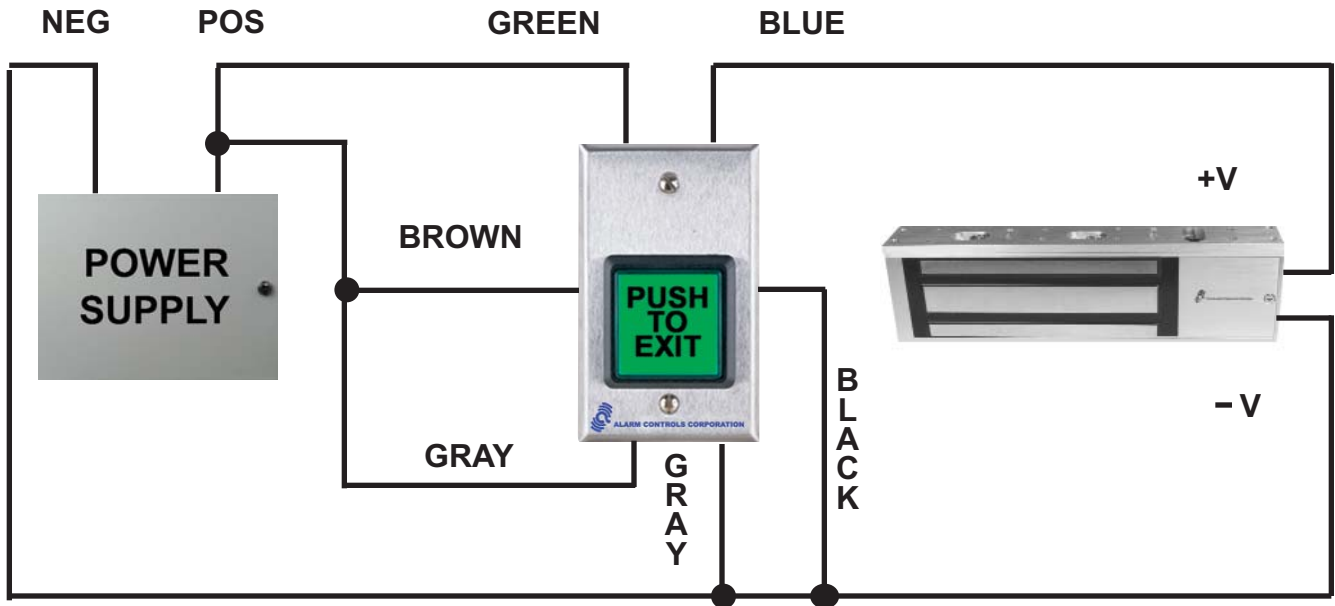

ELECTRIC DOOR STRIKE FAIL SECURE MODE

