
Strike	Strike Box Depth (Minimum)	Template Cross Reference	
		Lock Series	Template
586L19	<u>3/4</u> (19.1)	CL3100	T31193
		CL3300	T30684
		CL33903 & CL33905	T30971
		CL3500	T31001
		CL3800 (2007+)	T31005
		CK4200	T30341
		CK4400	T30400
		HP3000	T31188
		TL3700	T31048

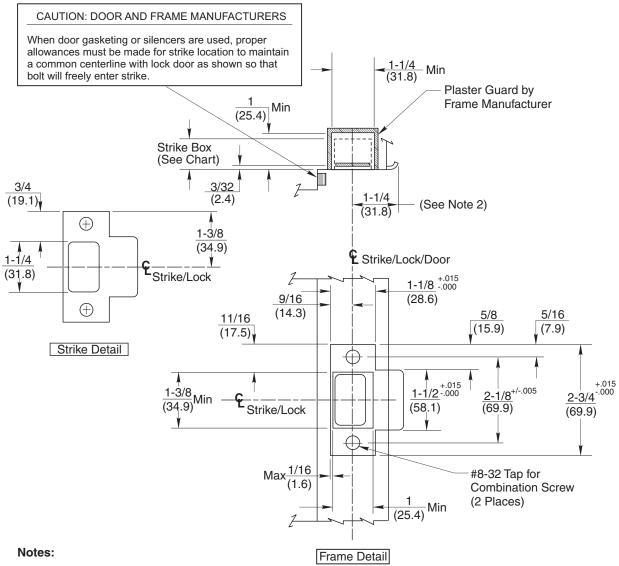

(8)

- 1. Dimensions given in inches and (mm).
- 2. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.

<b>Tolerance Conversion</b>		
Inches	(mm)	
.005	(.127)	
.015	(.381)	

## RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

## SC Series Curved Lip Box Strike

(See Chart)

## Corbin Russwin

**ASSA ABLOY** 

www.corbinrusswin.com

SUPERSEDES T30476-7 DO NOT SCALE DRAWING

T30476-8

03-12