


INSTALLATION INSTRUCTIONS

MODELS TS-2, TS-3, TS-4, TS-5



U.L. FILE SA32686 CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL

REAR VIEW OF PLATE

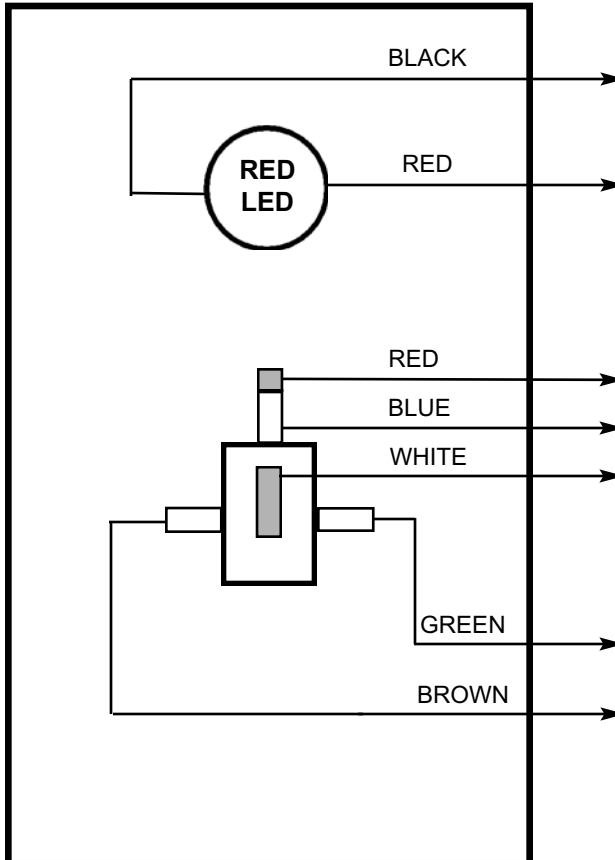

RED LED 12/24 VOLTS DC
RED LED ONLY ON TS-3, TS-5
LED CURRENT RATING
 9 MA. @ 12 VDC, 19 MA. @ 24 VDC
NEGATIVE (BLACK) LEAD
POSITIVE (RED) LEAD

SWITCH CONTACTS
RATED 2A. @ 12 - 28 VDC
N/C (RED) LEAD LOWER LUG
N/O (BLUE) LEAD UPPER LUG
COM (WHITE) LEAD TOP LUG

INTERNAL LED
LED (GREEN) NEGATIVE LEAD
LED WILL OPERATE ON 12/24 VDC
LED (BROWN) POSITIVE LEAD

LED CURRENT DRAW
 4 MA. @ 12 VDC
 15 MA. @ 24 VDC
LED OPERATES ON 12/24 VDC

MOUNT WALLPLATE IN A VERTICAL POSITION
 MODELS TS-2, TS-3, TS-4 & TS-5
 SHOULD BE MOUNTED IN A
 2.5 INCH DEEP ELECTRICAL BOX



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500

WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM